

Distributed by: **Trick-Tools.com**


Trick-Tools
80 Truman Road
Pella, IA 50219

Phone: 1-877-VAN-SANT
E-mail: sales@trick-tools.com




Here at Trick Tools we believe that our customers deserve the best value in their tool and equipment purchases. We are constantly at work searching out a variety of high quality, high performance tools to offer at the best prices possible. Our commitment to you is that we will not offer "cheap junk" anywhere on our website. You, the customer, help us to evaluate our products constantly and as soon as an ongoing quality issue is uncovered we will correct it or discontinue that product immediately. We hope to earn your continued trust.










Versione 2 velocità - Two speed version - Zwei Geschwindigkeit
Ausführung - Version 2 vitesse - Version 2 velocidad - Versão 2
velocidade

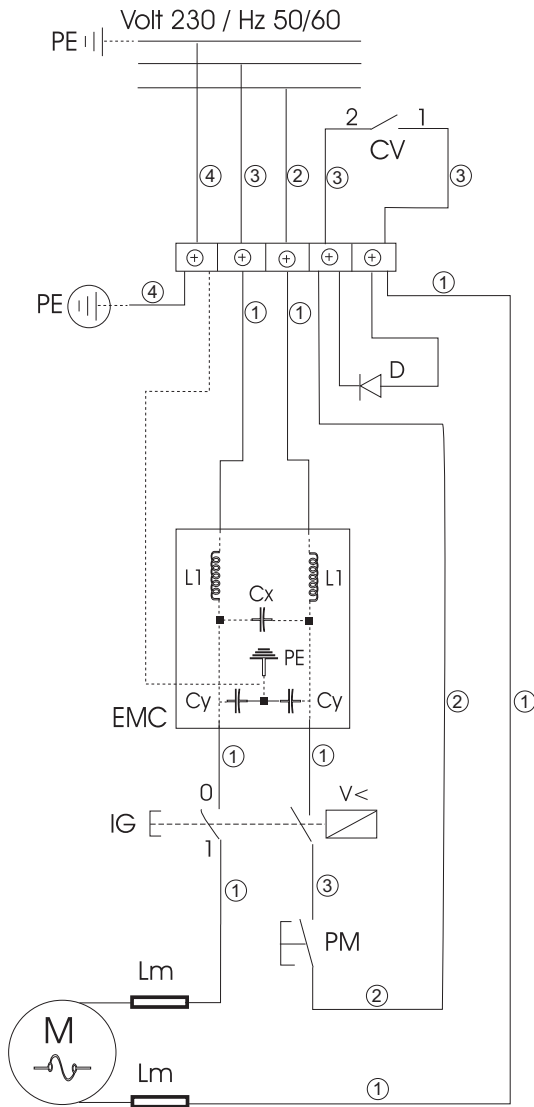


Versione elettronica - Electronic version - Elektronische Ausführung
- Versionélectronique - Version electronica - Versãoelectronica

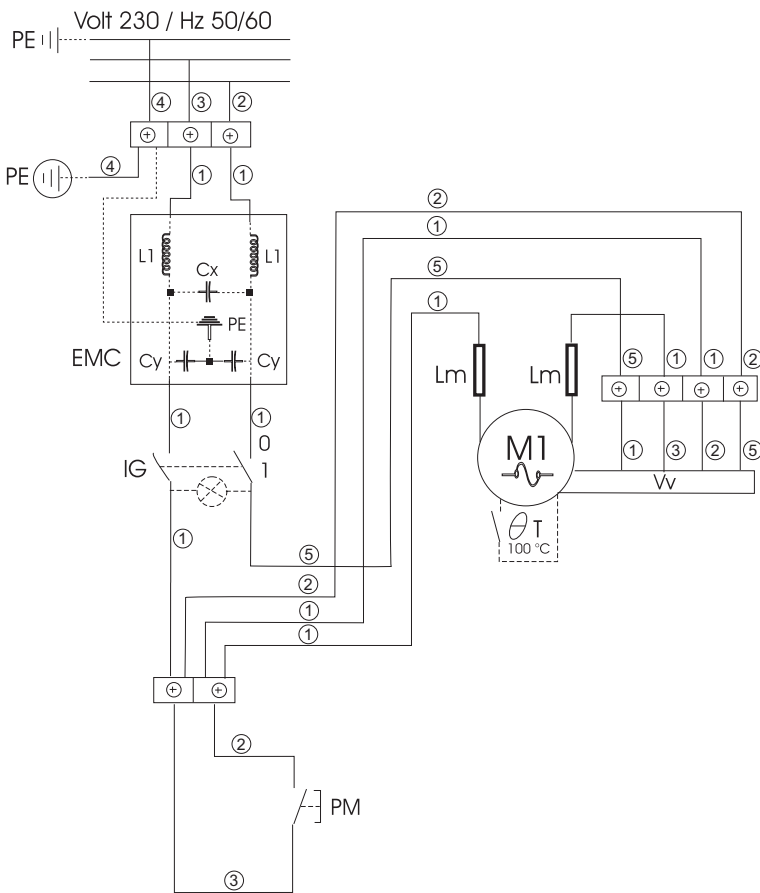

	ITALIANO	ENGLISH	DEUTSCH
PE	Circuito di protezione	Protection circuit	Erdung
IG	Interruttore generale magnetico	Magnetic main switch	Magnetische hauptschalter
PM	Pulsante di marcia	Run button	Handschalter
D	Dado elettronico	Electronic diode	Elektronicdiode
EMC	Filtro antidisturbo	Radio interference suppressor	Entstorer
L1	Induttanze 2x1 mH	Inductance 2x1 mH	Induktiv 2x1 mH
Lm	Induttanze schermatura motore	Motor antijamming inductance	Motor Entstörinduktivität
Cx	Condensatore 0,1 mF	Condensator 0,1 mF	Kondensator 0,1 mF
Cy	Condensatore 2z2500 pF	Condensator 2z2500 pF	Kondensator 2z2500 pF
Cv	Vanatore di velocità	Cutting speed adjustment	Geschwindigkeitsvariator
M	Motore V 230 Hz 50 950 Watt	Motor V 230 Hz 50 950 Watt	Motor V 230 Hz 50 950 Watt
1	Nero	Black	Schwarz
2	Blu	Blue	Blau
3	Marrone	Brown	Braun
4	G/V	Y/G	G/G
5	Rosso	Red	Rot
	FRANCAIS	ESPAÑOL	PORTUGUÊS
PE	Circuit de protection	Circuito de protección	Circuito de protecao
IG	Interruteur général magnetique	Interrupteur general magnetico	Interruptor general luminoso
PM	Bouton de marche	Pulsador de marcha	Botao de arranque
D	Diode électronique	Diodo electrónico	Diodo electrónico
EMC	Filtre anti-brouillages	Filtro antiperturbaciones	Filtro anti-interferencia
L1	Inductance 2x1 mH	Inductancia 2x1 mH	Indutancia 2x1 mH
Lm	Inductance anti-brouillages du moteur	Inductancia antiperturbaciones motor	Indutancia motor
Cx	Condensateur 0,1 mF	Condensador 0,1 mF	Condensador 0,1 mF
Cy	Condensateur 2z2500 pF	Condensador 2z2500 pF	Condensador 2z2500 pF
Vv	Variateur de vitesse	Variador de velocidad	Reostato de velocidade
M	Moteur V 230 Hz 50 950 Watt	MotorV 230 Hz 50 950 Watt	Motor V 230 Hz 50 950 Watt
1	Noir	Negro	Preto
2	Bleu	Azul	Azul
3	Marron	Marron	Vermelho
4	J/V	A/V	A/V
5	Rouge	Rojo	Vermel.

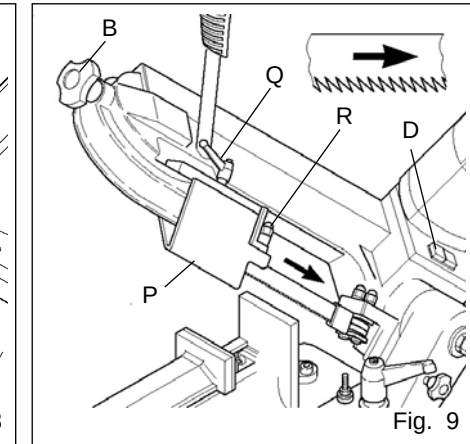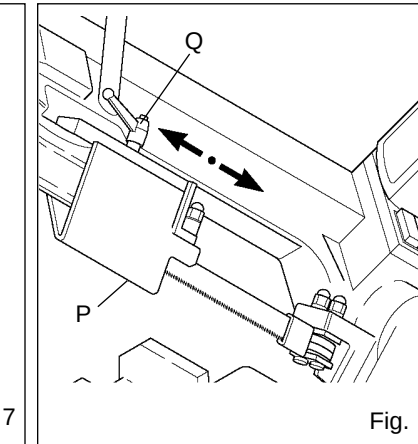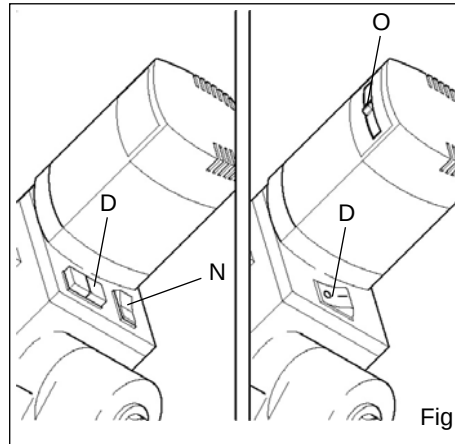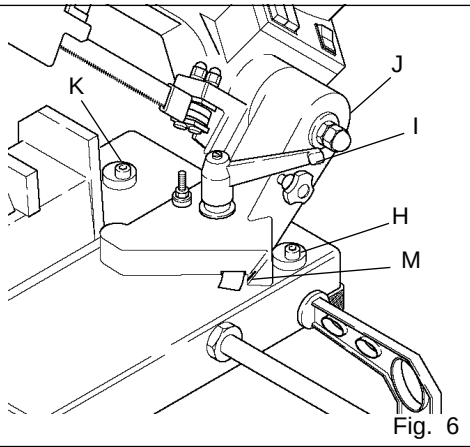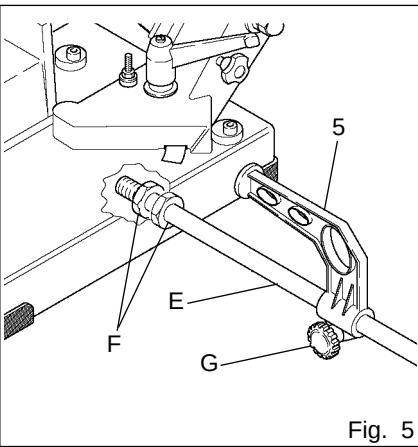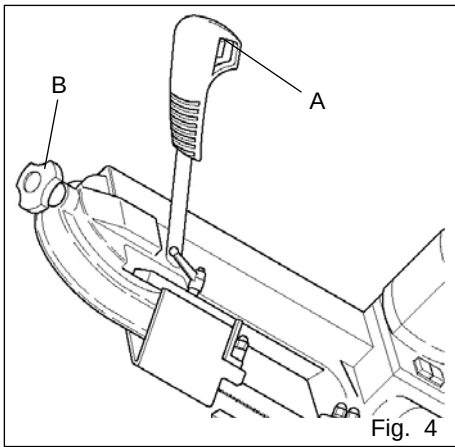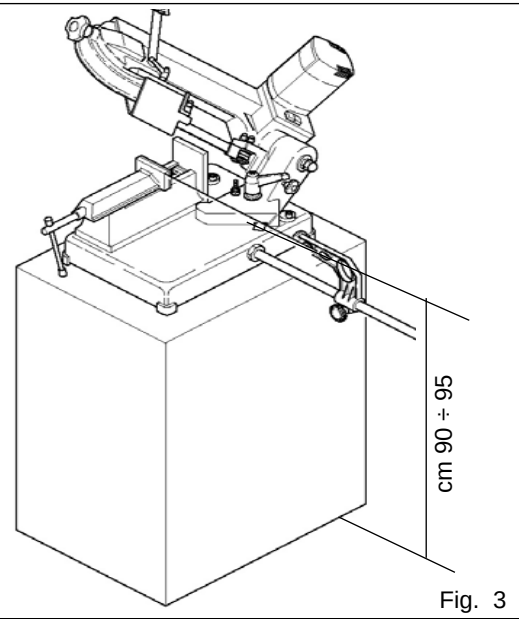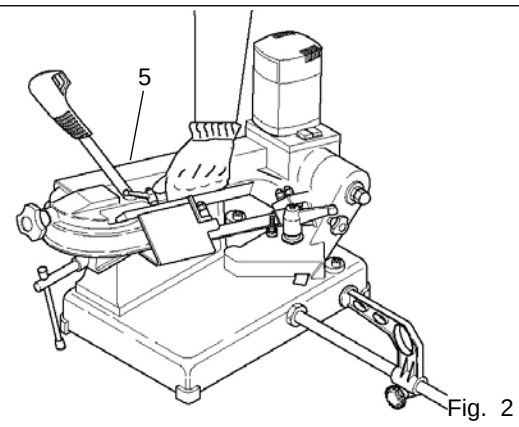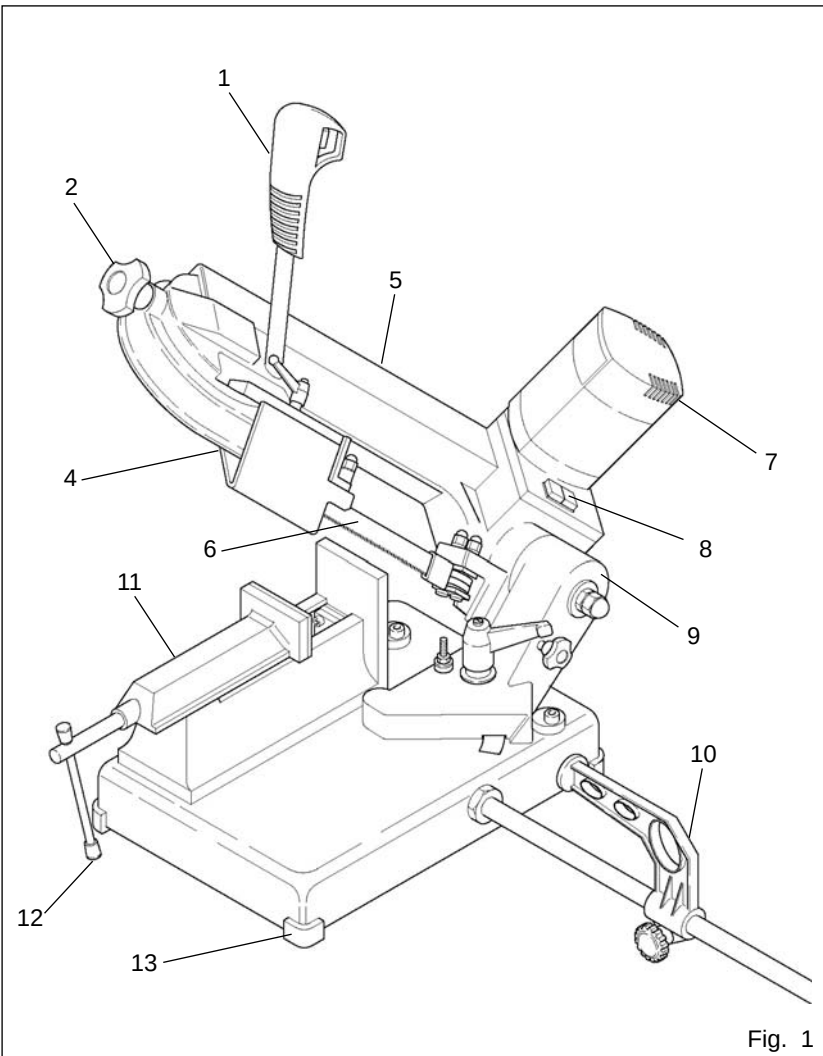

NR. 1

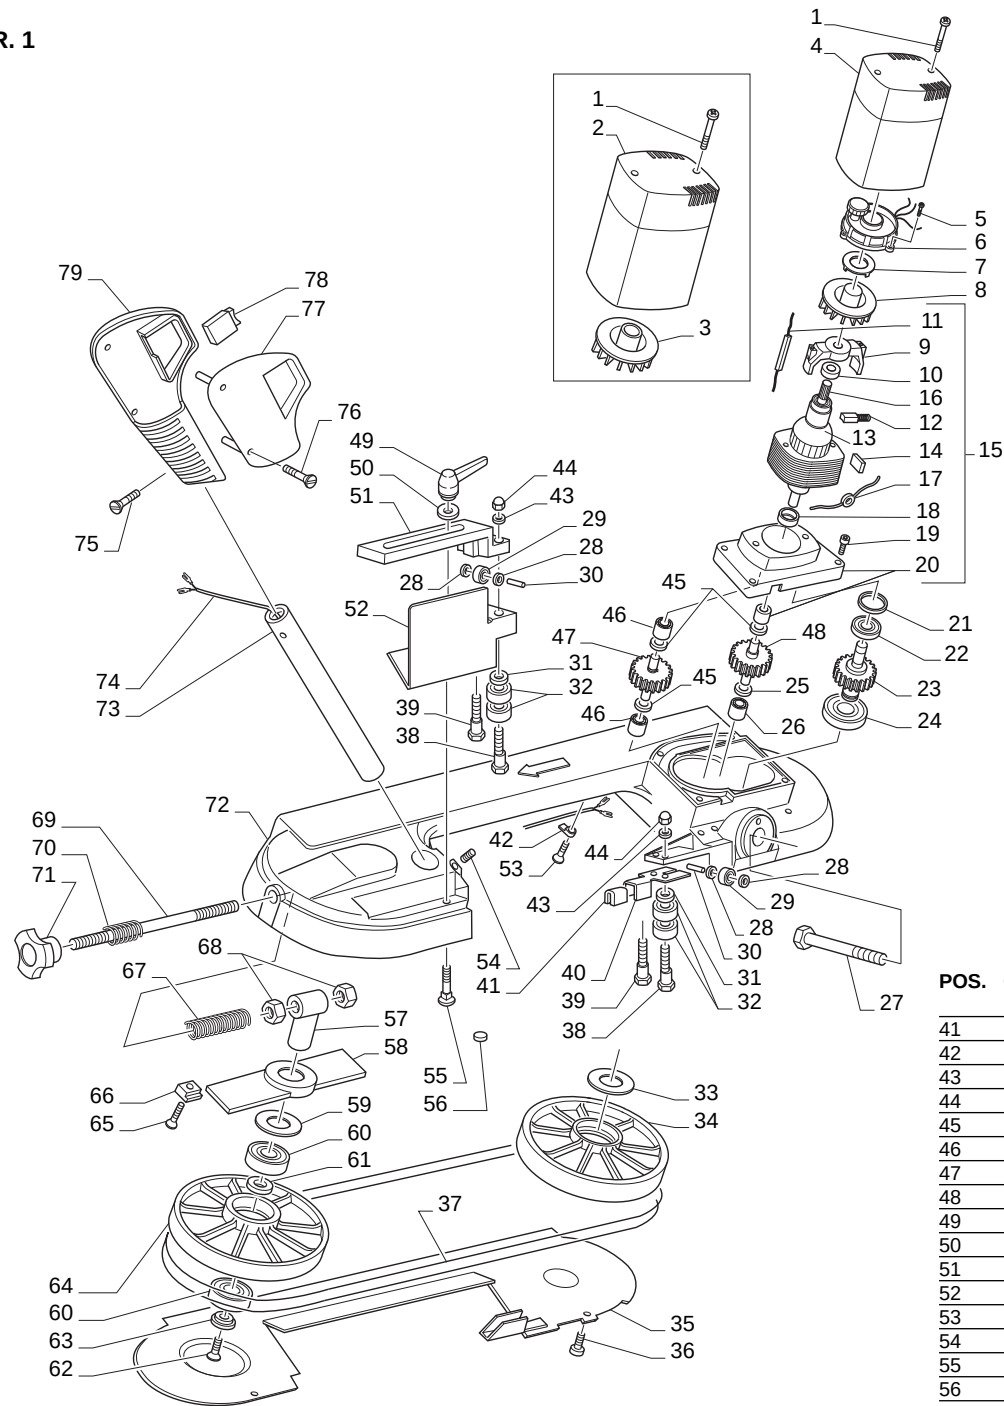


POS. COD./KOD. NOTE/MERKE/NOTES/NOTA/NOTAS

41	5.18.10.16	
42	5.15.41.03	
43	0.12.02.06	
44	0.10.21.06	
45	0.15.51.40	
46	0.73.06.09	
47	7.21.30.01	
48	7.21.30.07	
49	0.14.70.00	
50	0.12.07.06	
51	5.13.09.32	
52	5.18.18.44	
53	0.40.05.14	
54	0.41.06.57	
55	0.40.06.04	
56	0.17.99.01	
57	5.00.15.64	
58	5.13.78.69	
59	0.15.51.52	
60	0.59.60.02	
61	5.12.06.63	
62	0.38.06.15	
63	5.12.40.62	
64	5.21.42.25	
65	0.40.05.15	
66	5.13.07.34	
67	5.08.10.05	
68	0.10.01.08	
69	5.10.05.06	
70	5.08.10.21	
71	0.14.00.74	
72	5.04.28.44	
73	5.14.20.70	
74	5.87.08.47	
75	0.42.04.62	
76	0.42.06.76	
77	0.05.01.22	
78	0.80.23.17	
79	5.05.01.21	

POS.	COD./KOD.	NOTE/MERKE/NOTES/NOTA/NOTAS
1	0.42.06.72	
2	5.18.28.37	VERSIONE 2 VELOCITA'
3	5.11.20.21	VERSIONE 2 VELOCITA'
4	5.18.28.38	VERSIONE ELETTRONICA
5	0.42.07.69	
6	7.82.01.04	
7	5.18.20.05	
8	5.85.01.11	VERSIONE ELETTRONICA
9	5.85.00.05	
10	5.06.10.38	
11	0.81.60.05	
12	5.85.01.09	
13	7.01.31.30	
14	0.13.05.02	VERSIONE ELETTRONICA
15	7.80.16.12	
16	5.02.41.11	
17	0.81.60.03	
18	5.06.10.39	
19	0.32.05.15	
20	5.18.25.22	

POS.	COD./KOD.	NOTE/MERKE/NOTES/NOTA/NOTAS
21	0.15.50.13	
22	0.57.06.27	
23	7.21.30.03	
24	0.60.62.02	
25	0.15.51.36	
26	0.73.08.10	
27	0.31.10.80	
28	0.12.90.04	
29	0.59.06.24	
30	0.17.40.22	
31	5.12.06.38	
32	0.60.06.07	
33	0.15.51.42	
34	5.21.40.19	
35	5.18.16.23	
36	0.40.05.13	
37	3.27.73.02	
38	5.10.00.65	
39	5.10.00.64	
40	5.13.09.39	

NR. 2

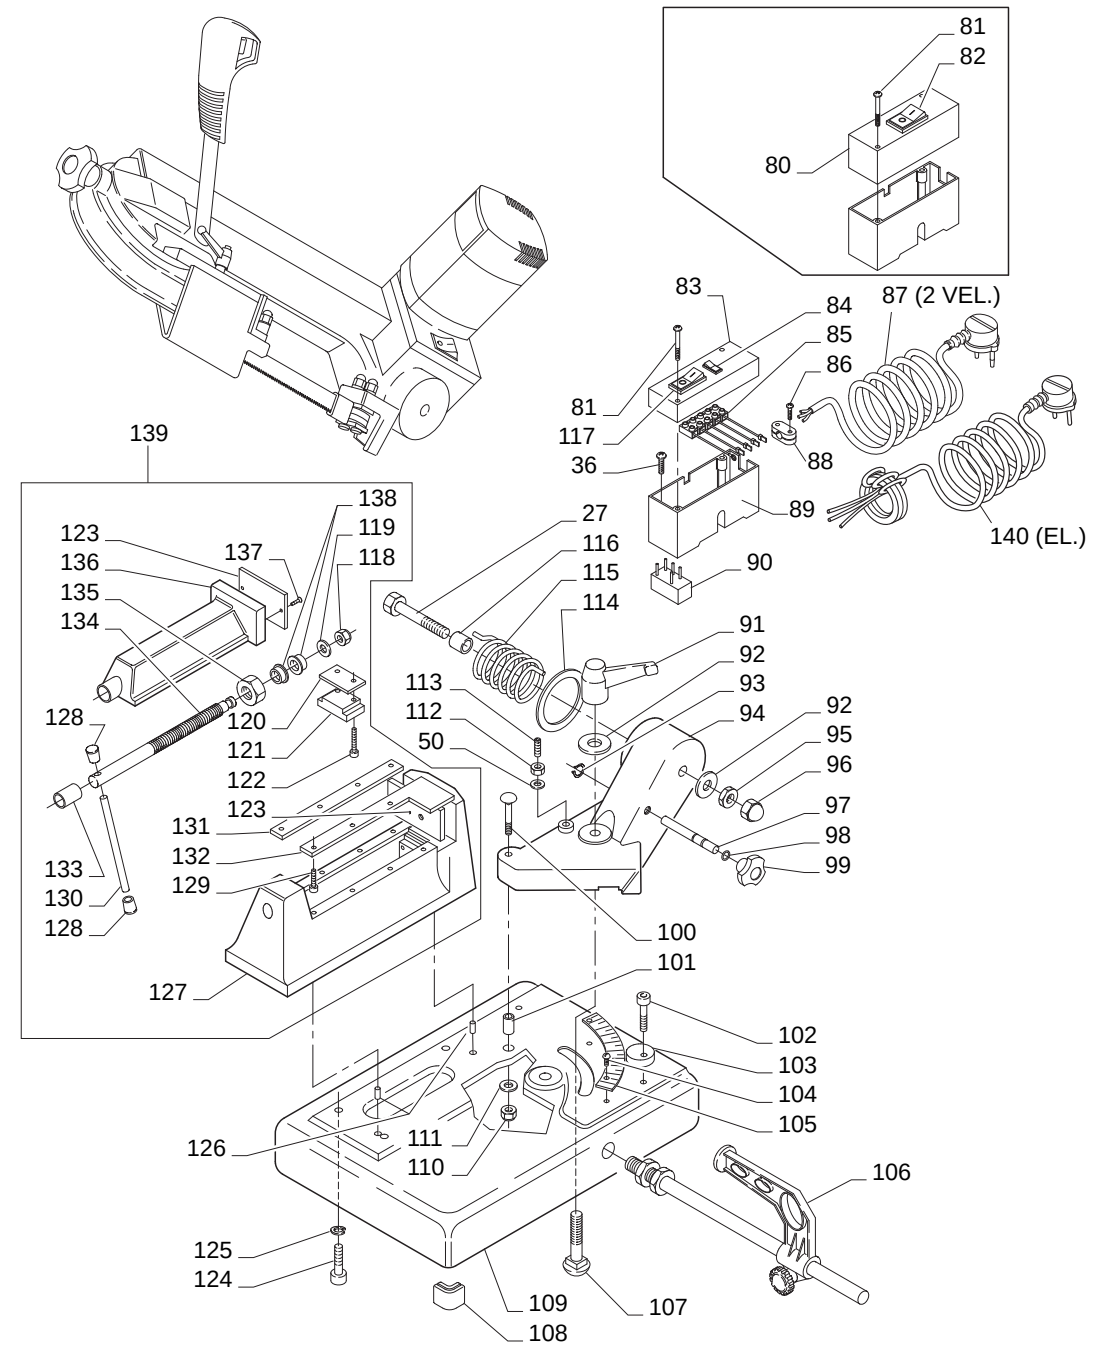

POS.	COD./KOD.	NOTE/MERKE/NOTES/NOTA/NOTAS
80	5.18.25.21	VERSIONE ELETTRONICA
81	0.42.06.82	
82	0.80.23.19	
83	5.18.25.20	
84	0.80.23.14	
85	7.89.01.01	
86	0.400.400	
87	5.87.08.43	(2 VEL.)
88	5.15.45.01	
89	5.18.28.40	
90	0.81.60.04	
91	0.14.70.02	
92	0.12.07.10	
93	0.15.14.09	
94	7.13.36.03	
95	0.10.04.10	
96	0.10.21.10	
97	5.17.10.43	
98	0.22.20.21	
99	0.14.00.76	
100	0.40.05.20	

POS.	COD./KOD.	NOTE/MERKE/NOTES/NOTA/NOTAS
101	0.06.30.42	
102	0.40.06.05	
103	5.12.40.29	
104	0.40.29.05	
105	5.40.13.19	
106	7.13.05.35	
107	0.40.10.01	
108	5.13.78.42	
109	5.13.37.63	
110	0.10.14.05	
111	0.08.02.61	
112	0.10.01.06	
113	0.41.06.13	
114	0.15.51.43	
115	5.08.01.16	
116	0.06.30.27	
117	0.80.26.06	
118	0.10.14.08	
119	0.15.51.50	
120	5.13.04.16	
121	5.13.04.28	

POS.	COD./KOD.	NOTE/MERKE/NOTES/NOTA/NOTAS
122	0.32.05.20	
123	5.15.26.13	
	5.15.26.14	
124	0.32.08.16	
125	0.12.02.08	
126	0.15.07.01	
127	5.04.28.49	
128	5.15.00.05	
129	0.32.06.20	
130	5.14.20.14	
131	5.13.04.26	
132	5.13.04.27	
133	5.06.30.34	
134	5.10.03.20	
135	0.10.01.16	
136	5.04.28.50	
137	0.38.06.10	
138	0.06.30.41	
139	7.13.06.70	
140	7.89.01.06	(EL.)