



FOR MAKERS. SINCE 1957.

WERKZEUGE UND WERKZEUGERSATZTEILE

Tooling and Tooling Spares
Outils et pièces de rechange
Utensili e pezzi di ricambio
Útiles y piezas de recambio




KF 170 PD




Distributed by: **Trick-Tools.com**

Trick-Tools
75 Truman Road
Pella, IA 50219

Phone: 1-877-VAN-SANT
E-mail: sales@trick-tools.com

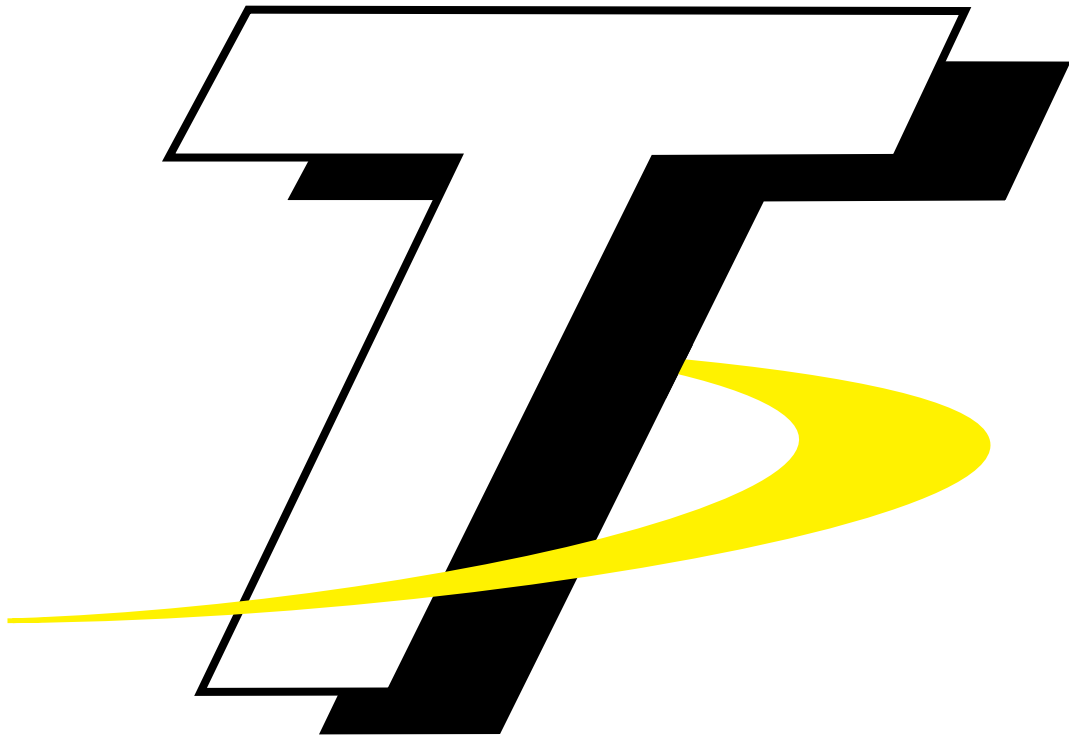

Here at Trick Tools we believe that our customers deserve the best value in their tool and equipment purchases. We are constantly at work searching out a variety of high quality, high performance tools to offer at the best prices possible. Our commitment to you is that we will not offer "cheap junk" anywhere on our website. You, the customer, help us to evaluate our products constantly and as soon as an ongoing quality issue is uncovered we will correct it or discontinue that product immediately. We hope to earn your continued trust.

ASW 42 K		Bestell-Nr Order no. No. de commande	Dimension (mm)	kg	Leistung / Capacity / Capacité max. (mm)		
					Stahl / Steel / Acier (~400 N/mm ²)	Inox. 18/8 (~600 N/mm ²)	Aluminium (~250 N/mm ²)
		022.100.0001	-	2,6	1,5	1,0	2,0

Ausschneidwerkzeug Typ ASW 42 K

zum Ausklinken von rechteckigen und winkligen Randausschnitten (max. 40 x 40 mm/pro Hub).
Messer und Schneidplatten auswechselbar. Mit verstellbarem Anschlag zum genauen
Einhalten von Schnittwinkel und Schnitttiefe.

Notching Tool Type ASW 42 K

for notching square and cornered edge cutouts (max. 40 x 40 mm/per stroke).
Die plate and knife interchangeable. With adjustable stop to ensure preciseguiding of
the workpiece in case of serial work with identic cutting angles and depths.

L'outil à gruger type ASW 42 K


permet de découper des bords rectangulaires et angulaires (max. 40 x 40 mm/par course).
Couteau et plaques de découpage interchangeables. Avec butée réglable pour
observer exactement l'angle de coupe et la profondeur.

Utensile per tranciare tipo ASW 42 K

per la tranciatura di zone marginali rettangolari e angolari (max. 40 x 40 mm/taglio). Matrice e lama tranciatrice intercambiabili.
L'arresto spostabile garantisce il mantenimento della misura dell'angolo di taglio e della profondità.

Herramienta de cortar tipo ASW 42 K

para efectuar cortes rectos y en angulo (max. 40 x 40 mm/corte). Cuchilla y placas de corte intercambiables.
El tope graduable permite la colocación exacta del angulo de corte y la profundidad.

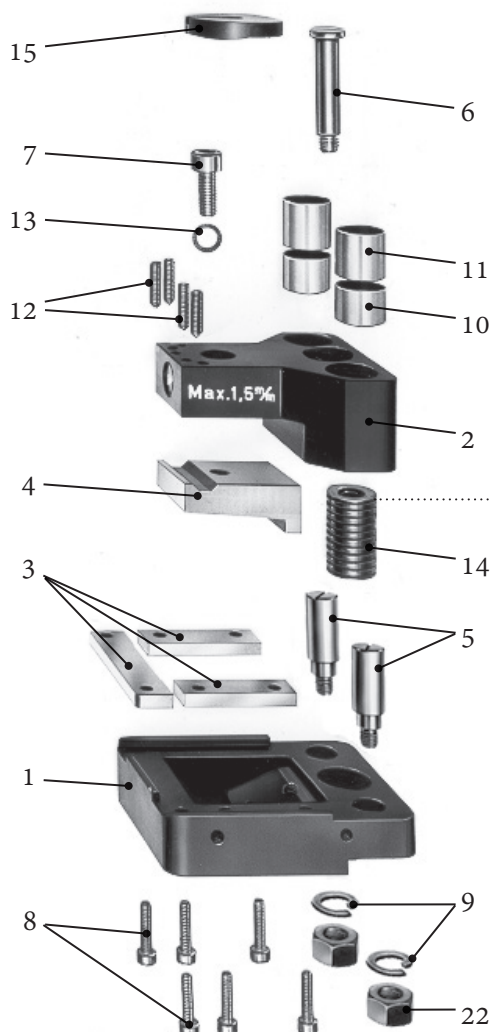

Nicht im Dauerhubmodus einsetzbar!
Not to be used in continuous mode!
Ne pas utiliser en course continue!


Hinweise zur Werkzeugwartung am Schluss des
Kataloges.

Maintenance instructions at the end of the
catalogue.

Instructions d'entretien à la fin du catalogue.

Indicazioni circa la manutenzione degli utensili
al fondo del catalogo.

Instrucciones para la conservación, al final del
catálogo.

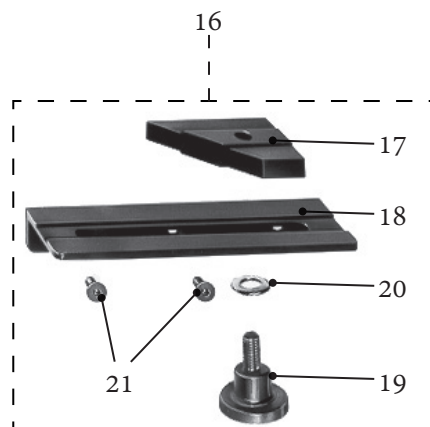

ECKOLD-KRAFTFORMER KF 170 PD					Ersatzteile Spare Parts Pièces de Rechange		ASW 42 K
Pos. No.	Satz Set Jeu Serie Juego	Stück Piece Pièce Pezzo Pieza	Bezeichnung Description	Désignation Denominazione Denominacion	Dimension / Typ Dimension / Type Dimensione / Tipo Dimensión / Tipo	Ident.-No (Für D/NL)	Artikel Nr. Order No. No. de commande No. per l'ordine No. de pieza
	1		Ausschneidwerkzeug Notching Tool	Outil à gruger Utensile per tranciare Herramienta de cortar	ASW 42 K	0000 001 7214	022.100.0001
1.		1	Tragkörper Tool body	Corps support Corpo portante Tocho	2.4201/1	0061 400 9014	026.200.0000
2.		1	Messerträger Knife holder	Porte-lame Supporto del coltello Porta cuchilla	2.4201/2	-	026.200.0005
3.	1	3	Schneidplatte 3-teilig Die plate (in 3 parts)	Plaque de découpage (3 parties) Matrice (tripartito) Placa de corte	2.4003/1	0061 400 9030	026.200.0010
4.		1	Messer Knife	Lame Spinotto di guida Bulón de guía	2.4003/2	-	026.200.0015
5.		2	Führungsbolzen Guiding bolt	Boulon de guidage Spinotto di guida Bulón de guía	2.4204	0061 400 9048	026.200.0020
6.		1	Federbolzen Spring bolt	Boulon à ressort Biscotino Bulón	2.4005	0061 400 9056	026.200.0030
7.		1	Zylinderschraube Cylindrical screw	Vis cylindrique Vite a testa cilindrica Tornillo cilíndrico	DIN 912, M8 x 20 2.4006	0061 400 9069	252.000.0405
8.		6	Zylinderschraube Cylindrical screw	Vis cylindrique Vite a testa cilindrica Tornillo cilíndrico	DIN 912 M5 x 20 2.4007	0061 400 9077	252.000.0207
9.		2	Sicherungsring Locking disc	Disque de sûreté Disco di sicurezza Arandela de seguridad	DIN 127 Ø 10 2.4208	0061 400 9085	258.201.0012
10.		2	Lagerbuchse (Glacier) Bearing bush	Coussinet de palier Bossolo Casquillo	NB 1815 DU 2.4009	-	261.002.0480
11.		2	Lagerbuchse (Glacier) Bearing bush	Coussinet de palier Bossolo Casquillo	NB 1820 DU 2.4009	-	261.002.0500
12.		4	Gewindestift Threaded pin	Goupille filetées Spina filetata Pasador roscado	DIN 914 M5 x 20 2.4010	0061 400 9100	256.023.0308
13.		1	Sicherungsscheibe Locking disc	Disque de sûreté Disco di sicurezza Arandela de seguridad	Ø 8 2.4011	0061 400 9118	258.250.0090
14.		25	Tellerfeder Cup spring	Ressort concave Molla a disco Resorte de disco	DIN 2093A 20 x 10.2 x 1.1 2.4012	0050 209 3762	258.280.1280
15.		1	Druckplatte Pressure plate	Plaque de pression Piastra di pressione Placa de presión	2.4013	0061 400 9139	026.200.0110
16.		1	Verstellanschlag komplett Adjustable stop complete	Butée réglable complet Arresto spostabile completa Tope graduable completa	2.4014 - 2.4018	0000 001 1834	026.200.0200
17.		1	Verstellanschlag Adjustable stop	Butée réglable Arresto spostabile Tope graduable	2.4014	-	026.200.0120
18.		1	Führungsschiene Guide rail	Barre conductrice Controrotaia Guía de carril	2.4015	-	026.200.0130
19.		1	Rändelschraube Knurled screw	Vis moletée Vite godronata Tornillo moleteado	DIN 913 + DIN 466 M8 x 35 2.4016	-	026.200.0140
20.		1	Unterlagsscheibe Washer	Rondelle Rondella Arandela	DIN 125B Ø 8 2.4017	-	258.021.0003
21.		2	Senkschraube Countersunk screw	Vis à tête fraisée Vite a testa piana Tornillo avellanado	DIN 7991 M5 x 10 2.4018	-	252.081.0401
22.		2	Mutter Screw nut	Ecrou Dado Tuerca	VSM 13756 M10 2.4219	0061 400 9192	257.120.0180
ECKOLD AG Rheinstrasse 8 CH-7203 Trimmis Switzerland +41 81 354 12 00 www.eckold.com info@eckold.ch							