


Distributed by: **Trick-Tools.com**

Trick-Tools  
75 Truman Road  
Pella, IA 50219

Phone: 1-877-VAN-SANT  
E-mail: [sales@trick-tools.com](mailto:sales@trick-tools.com)

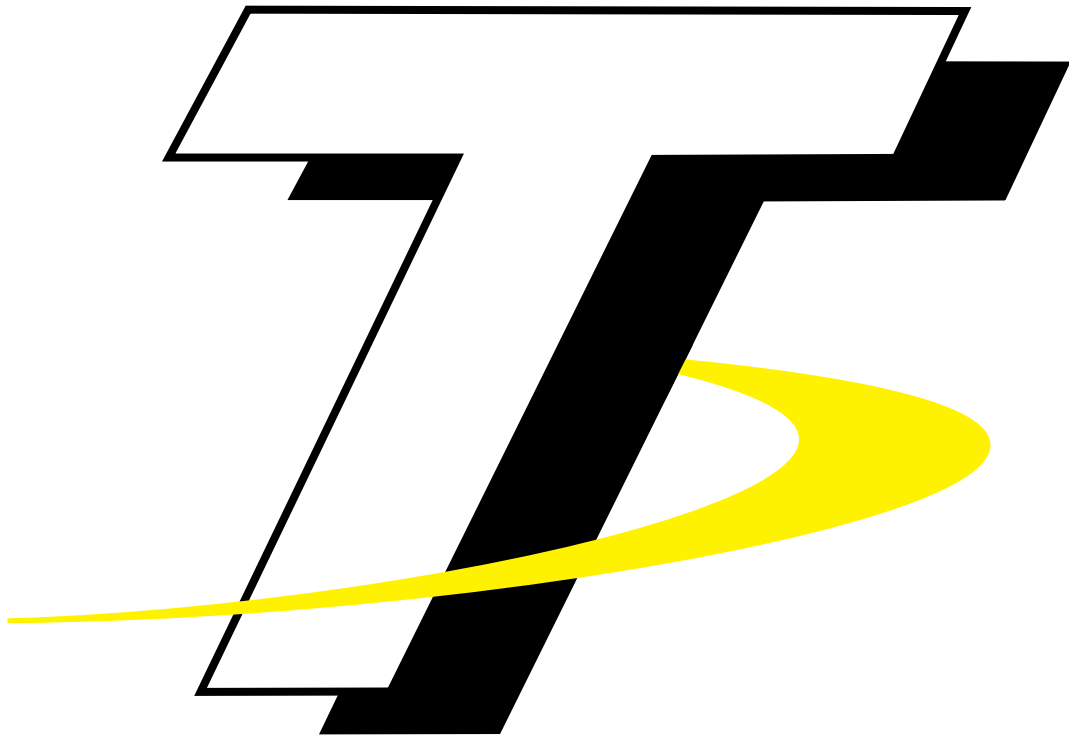

Here at Trick Tools we believe that our customers deserve the best value in their tool and equipment purchases. We are constantly at work searching out a variety of high quality, high performance tools to offer at the best prices possible. Our commitment to you is that we will not offer "cheap junk" anywhere on our website. You, the customer, help us to evaluate our products constantly and as soon as an ongoing quality issue is uncovered we will correct it or discontinue that product immediately. We hope to earn your continued trust.

## Betenbender 8 foot Hydraulic Shear, 1/8 inch (10 ga)



Item # 8'-125, 1/8" or 10 GA Hydraulic Shears

A precision cut doesn't happen by chance. It takes a shear that can make a razor-sharp cut time after time. Betenbender overdriven and underdriven Hydraulic Shears are designed to do exactly that.

Betenbender designs simplicity and safety into its shears-with an advanced hydraulic system, and flexible operation. They're easy to operate, easy to maintain and able to withstand the rigors of today's production demands. A wide range of options are available.

### Features

- **Controls:** Push button and switch controls are at your fingertips. The fully guarded, 2-position 110v footswitch lets you interrupt the cutting stroke at any point in its cycle.
- **Easy Material Handling:** A sturdy backgauge and rake angle adjustment minimizes twist and distortion. This makes it possible to increase the rake for cutting heavier stock and extend maximum capacity of the machine. A 4' squaring arm with a recessed scale makes for fast, easy measurement.
- **Single Piece Top and Bottom, High Carbon, High Chrome Shock Resistant Knives:** Provide four separate edges for clean cuts and long blade life. Easy blade gap adjustment means precise cuts for a wide variety of materials.
- **Electrical System:** Meets NFPA 79 and construction requirements of the ANSI B11.4. All machines have disconnect switches magnetic starters, 110/120v controls, and 208-230/460v 3 phase, others optional.
- **Backgauges:** A Betenbender Shear is capable of shearing 1/8" (10 GA) material to the following tolerance: Dimension - The width of the off-cut portion of the workpiece is within  $\pm 0.005$  inch of the backgauge setting.

### Dimensions

Knives	1x3
Motor Size <sup>1</sup>	10 hp
Overall Length (Dimension A)	121 in
Overall Height (Dimension B)	55 in
Table Height (Dimension C)	32 in
Anchor Bolt Dimension/Length (Dimension D)	100 in
Anchor Bolt Dimension/Width (Dimension E)	36 in
End Plate Width (Dimension F)	30 in

Machine with Backgauge (Dimension G)	74 in
Squaring Arm Length, 4' Std. (Dimension H)	30 in
Knife Length (Dimension I)	100 in
Rake Angle per Rated Capacity (Dimension J)	1/4 in
Strokes per Minute (Dimension K)	32 in
Number of Holddown Pins (Dimension L)	15 in
Weight <sup>2</sup>	6,800 lb

<sup>1</sup> Larger motor sizes are available. To convert from horsepower to KW, multiply by 0.76.

<sup>2</sup> ESTIMATED WEIGHTS. The weight of your machine may vary from the estimated weight listed here. Weights may vary according to options included. Note: Engineering data and dimensions are subject to change without notice. Foundation plans available upon request. 1/4, 3/16, and 10 ga machines will be low profile unless it is a gap type machine. All estimated figures

### Standard Features:

- 208/230/460v 3 phase or 208v single phase
- 36" Power Backgauge with LED Readout Inch / Metric.
- 4' Squaring Arm with Inlaid Scale
- All Hydraulic Fluids Included
- All Steel Construction
- American Made Hoses and Fittings
- American Made Motor and Valves
- Disconnect Switch
- Hour Meter
- Hydraulic Pressure: 2500 psi

- Hydraulic Self-Compensating Hold-down Bar Assembly
- Light Beam Gauge (Shadow Line)
- Linemaster Foot Switch
- Manual Rapid Blade Gap Adjustment (3/8" and Larger)
- Manual Swingup Backgauge
- NEMA Electrics
- Power Adjust Variable Rake
- Safety Switch for Front Guard
- Single Piece Top and Bottom, Shock Resistant Knives with Four Cutting Edges


## Betenbender 8 foot Hydraulic Shear, 1/8 inch (10 ga)



### Optional Accessories / Upgrades: (Items in red are recommend options for all machines)

- 48" Support Arms/Front Gauges
- Neoprene Hold-down Caps
- One Shot Lubrication
- Solid Table Top - Bolt on Segments
- 5 Station NC "GO-TO" Positioner
- Angle Gauge
- Automatic Lubrication
- Ball Transfers
- Bolt/Shim Kit for Leveling
- Continuous Stroke (Includes Stroke Counter)
- Disappearing Stops (Support Arms)
- Dovetail Slots or T-Slots
- Electronic Stroke Control
- Extended Squaring Arm (4' Standard)
- Extra Foot Pedal with Keylock Switch
- Extra Length Backgauge
- Flip Up Stops (Squaring Arm)
- Harder Grade of High Carbon, High Chrome Knives
- Increase HP (Increase Speed)
- Independent Hold-down Control
- Inlaid Scale (0-48")

- Keylock Switch
- Left Hand Squaring Arm (4')
- Machined Solid Table Top Bed
- Oil Cooler
- Other Electrics and Motors
- Pneumatic Sheet Support
- Power Blade Gap Adjustment (10 GA, 3/16", 1/4")
- Special Paint Colors
- Stroke Counter

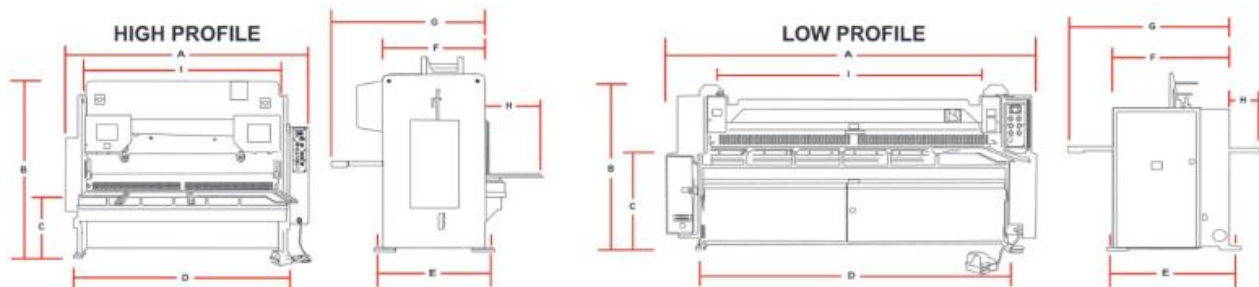

All dimensions are in inches unless otherwise noted.  
(To convert to centimeters multiply by 2.54)

Engineering data and dimensions are subject to change without notice due to continuing product development.

Foundation plans are available upon request.

10 GA, 3/16", and 1/4", machines will be low profile, unless it is a gap type machine.

\*Larger motor sizes are available. To convert from horsepower to KW, multiply by 0.746

\*\*ESTIMATED WEIGHTS. The weight of your machine may vary from the estimated weight listed here. Weights may vary according to options included.

\*\*\*1 x 12" has separate power unit.

HP	AMPS	
	208/230	460
5	14	7
10	28	14
15	39.6	19.3
20	52	26
25	68	34
30	80	40
40	104	52

**Please Note: ALL measurements and weights may vary from the figures given in this Specification Chart.**

A Overall Length	D Anchor Bolt Dimension/Length	G Machine w/ Backgauge	J Rake Angle per Rated Capacity
B Overall Height	E Anchor Bolt Dimension/Width	H Squaring Arm Length (4' Std.)	K Strokes Per Minute
C Table Height	F End Plate Width	I Knife Length	L Number of Holddown Pins