


RHINO PLATE CONNECTING BRIDGE KIT - TDPK311

Table of Contents:

- Specifications
- Parts List
- Assembly Instructions
- Related Product
- Maintenance
- Safety
- Limited Warranty

This guide is for connecting two 48" x 30" Rhino Carts to create an expansive 48" x 90" tabletop surface.

Meanwhile, It can connect two 48" x 48" Rhino Carts to create a 48" x 126" tabletop surface.

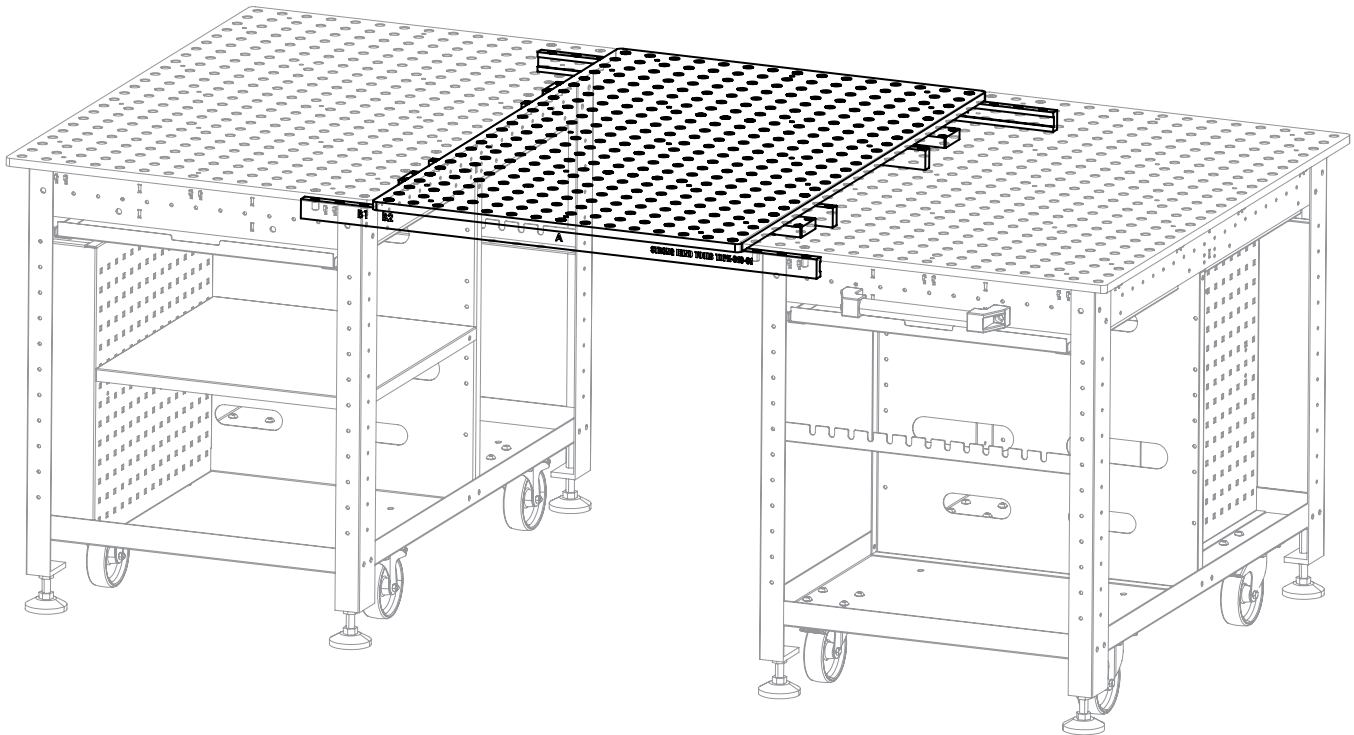

(COMPLETE SETUP SHOWN - RHINO CARTS NOT INCLUDED)

SPECIFICATIONS:

PN	Plate Dimensions	Center Beam Length	Side Beam Length	Connecting Block Dimensions	Nt. Wt.
TDPK311	48" x 30"	Approx. 33"	42"	Approx. 2.8" x 2.8"	284.8 lb

**Trick-Tools.com**

75 Truman Road
Pella, IA 50219


Phone: 1-877-VAN-SANT

E-mail: sales@trick-tools.com



* Please ensure thorough unpacking of all components and carefully compare them against the provided parts list. Prior to starting the assembly, review all accompanying instructions. It may be necessary to make adjustments to pre-assembled components during the process. Also, verify that you have all listed parts available before beginning. Any additional tools required for assembly, such as a standard adjustable wrench, will be supplied by the owner.

NOTE: The two 48" x 30" Rhino Carts shown below are **NOT INCLUDED** with this part number.

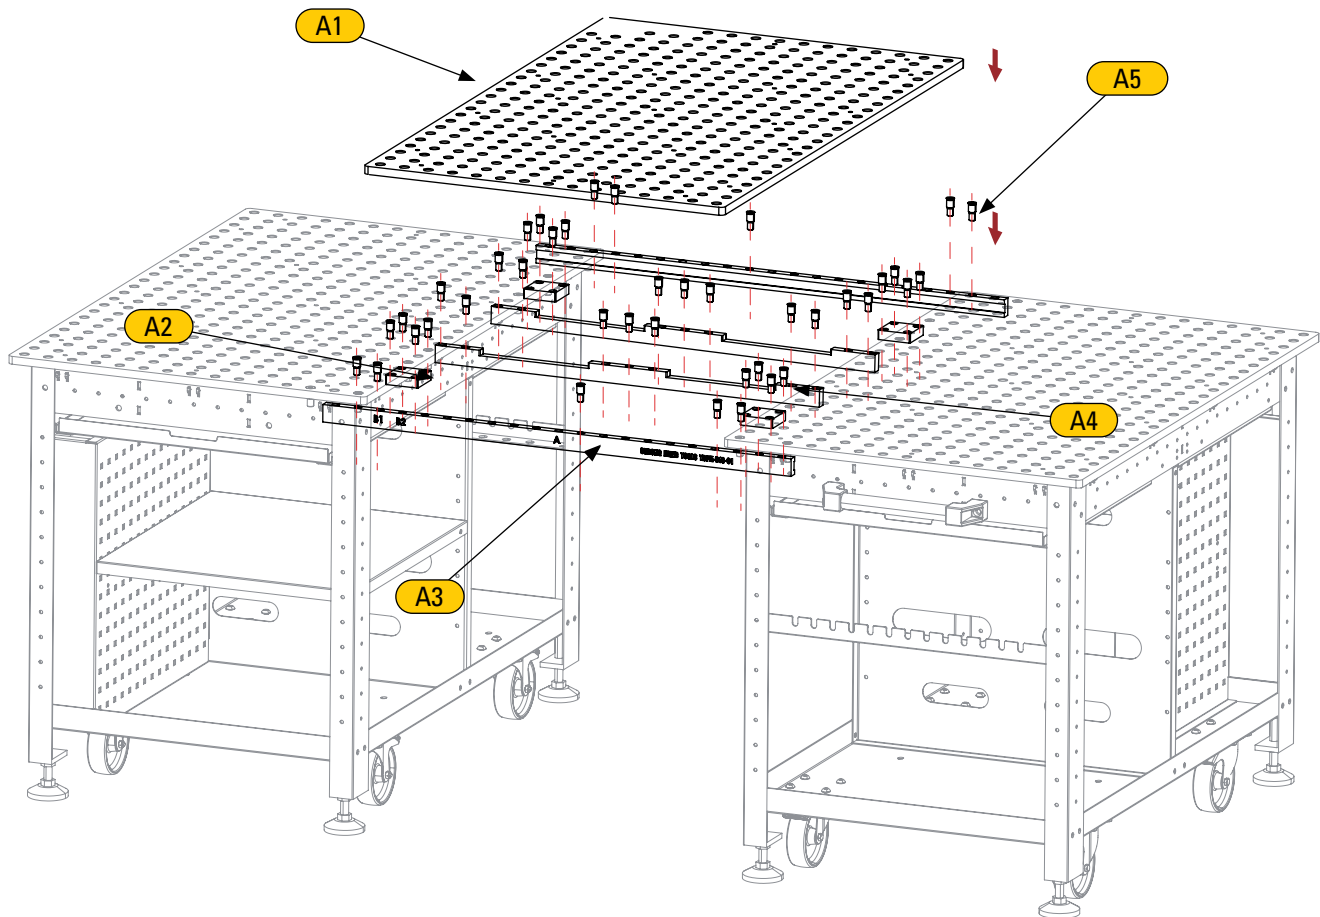

#	Description	Qty
A1	48" x 30" Table Plate	1
A2	Center Beam	2
A3	Side Beam	2
A4	Connecting Block	4
A5	M12 Flush Mount Screw	40





CAUTION: The Table Plate (A1) is very heavy. Use proper lifting techniques, team lifting, or equipment to avoid injury. Ensure the area is clear and follow all safety instructions.

RHINO PLATE CONNECTING BRIDGE KIT - TDPK311

STEP 1



Align two 48" x 30" Rhino Carts side by side, with the fixed wheels on one side and the swivel wheels on the other. Start mounting the Side Beams(A3) on the side with the fixed wheels.

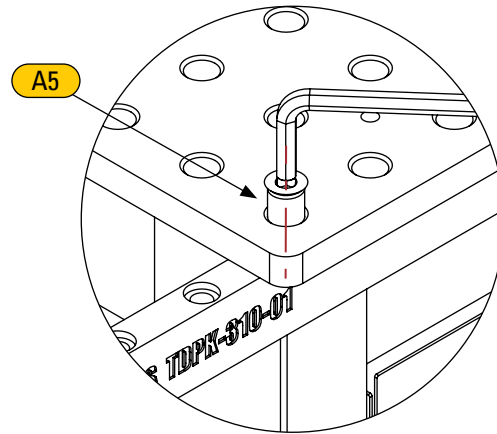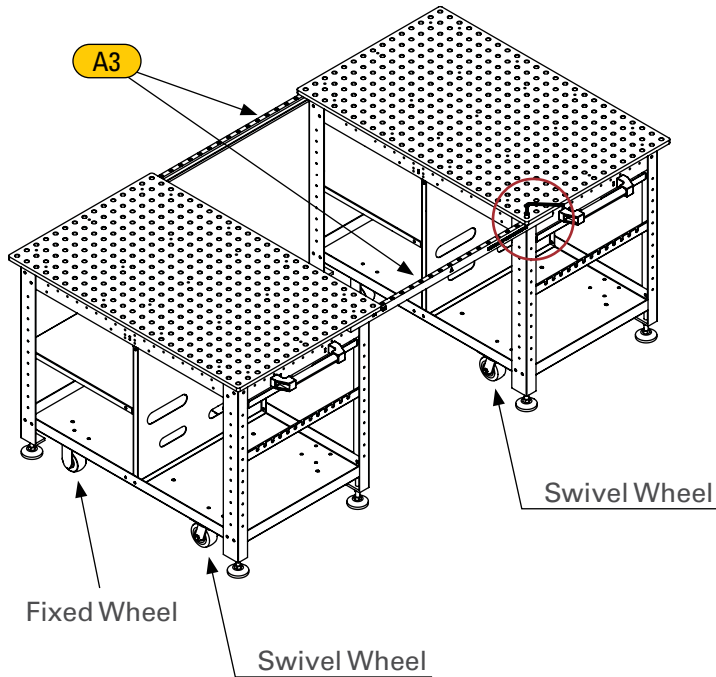

NOTE: After aligning the two Rhino Carts, check the level and adjust the leveling pads. This will ensure the Beams and Plate are flat when installed in the following steps.



STEP 2

Install four Connecting Blocks (A4)

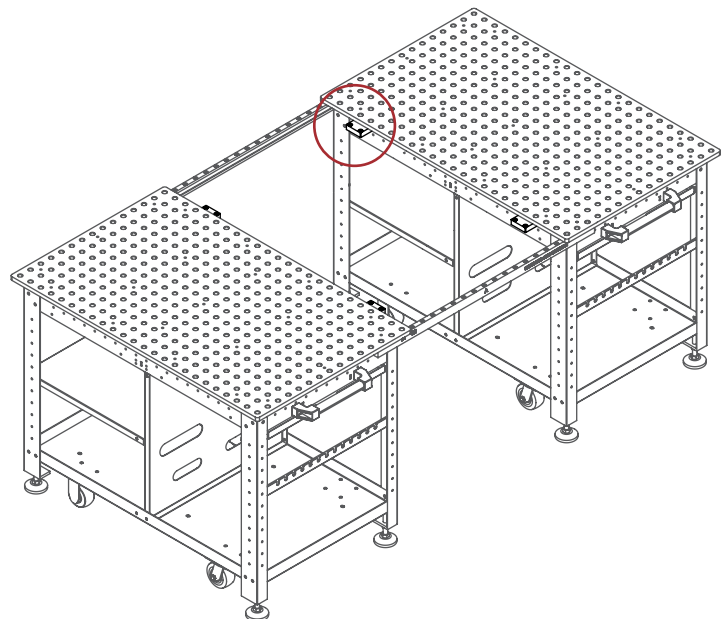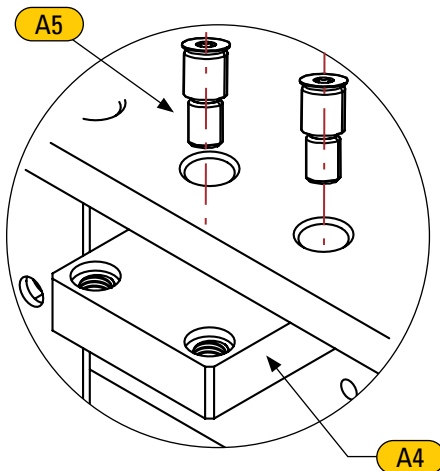


STEP 3

Attach the two Center Beams (A2) to connect both Rhino Carts.

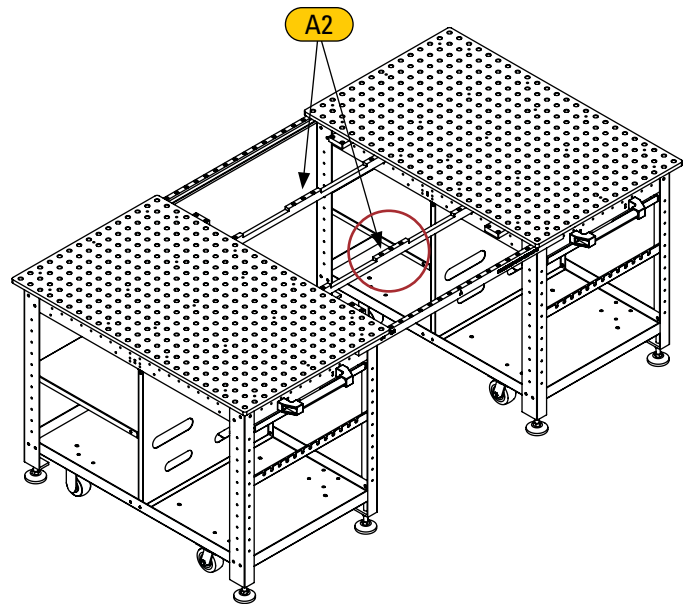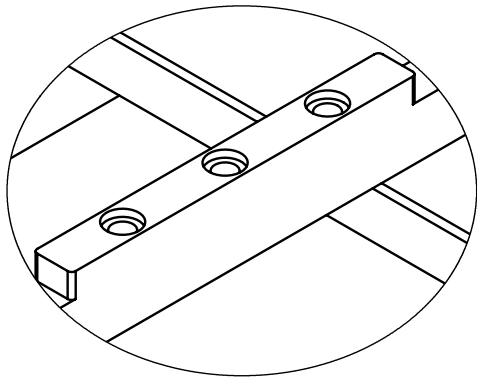

STEP 4

Place the Table Plate (A1) on top and secure it to the Connecting Blocks (A4) and Beams (A2, A3) using the Flush Mount Screws (A5).

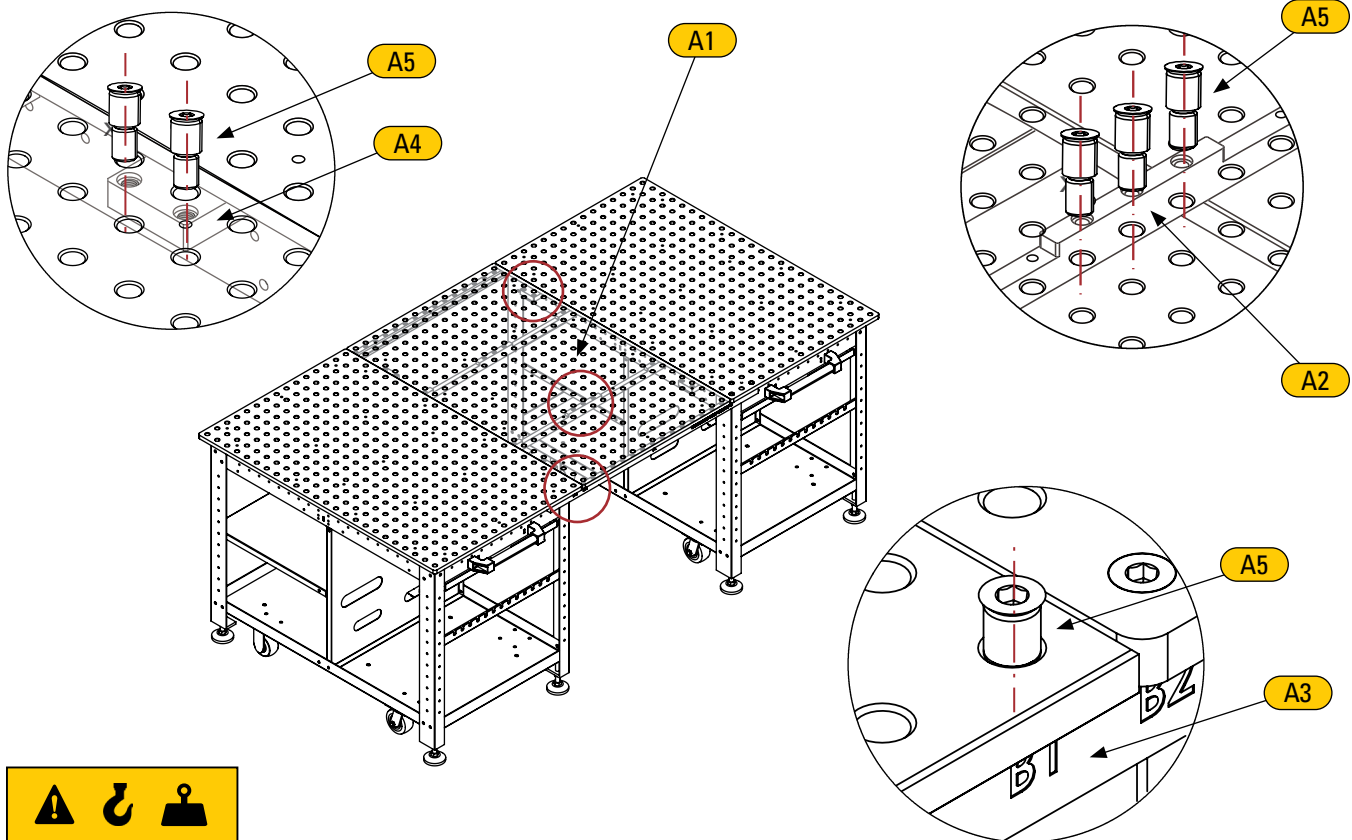

RHINO PLATE CONNECTING BRIDGE KIT - TDPK311

Get the complete package in one convenient purchase! Buy two Rhino Carts (with fixturing tools) along with the Connecting Bridge Kit, please go to our website for model **TD5-4830Q-EX3**.



For connecting two 48" x 6" table plates to a 48" x 30" Rhino Cart to create an expansive 48" x 42" tabletop surface, please go to our website for model **TDPK312**.

*Rhino Cart sold separately.

MAINTENANCE

Periodically inspect the wheels, locks, beams, and plate for any wear or damage, and replace parts as necessary. Wipe away dust and debris for optimal performance. Regularly check the leveling pads and adjust as needed to maintain stability.

SAFETY

ALWAYS wear safety goggles, gloves, and other appropriate safety items for protection. Ensure that the Rhino Carts are properly aligned and swivel wheels are securely locked before use to prevent any tipping or instability.

LIMITED WARRANTY

Each STRONG HAND TOOL product is warranted to be free from defects in material and workmanship. Return to place of purchase for a replacement if warranty applies.